


LED-Power supply EXT-T

The **EXT-T power supply** features a durable metal housing, ensuring long-lasting reliability. It supports DALI dimming from 1-100%, with a memory function for preset settings and light groups, along with the ability to recall stored functions. Fully compatible with standard DALI interfaces, it utilizes amplitude modulation for smooth and precise dimming.

Light regulation is easily managed via the PUSH SWITCH function using mains voltage. A short press turns the light on or off, while a longer press adjusts brightness. The system automatically stops at minimum and maximum levels, and the dimming level is stored and restored upon power recovery.

Dimensions

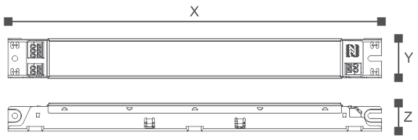

Metric:
280 mm, 359 mm (X)
30 mm (Y)
21 mm (Z)
Imperial
11.03 in, 14.14 in (X)
1.19 Inch (Y)
0.83 Inch (Z)

Technical Data

Dimming	Integrated interface(s) / control: DALI
Electrical data	
Constant current	208 mA | 350 mA | 500 mA
Protocol(s)	DALI
Input voltage	100 - 240, 277 VAC (50 - 60 Hz)
Protection class	I
Housing	Sheet steel
Environment	Indoor
Ingress protection rating	IP20
Approbation	CE
Weight	280 mm | 11.03 in→0.2 kg | 0.5 lb 359 mm | 14.14 in→0.3 kg | 0.6 lb The weight of the fixture can vary depending on the configuration!

sales@biontechnologies.com
www.biontechnologies.com
Phone:
(DE) +49 8231 95787 0

All information without guarantee. Errors, changes and misprints excepted.

LED-Power supply
EXT-T

Configurator

EXT-T - (1) _____ - (2) _____ - (3) _____ -Y01

1 Output	
ECO	208 mA
MP	350 mA
HP	500 mA

2 Dimming	
DALI	DALI

3 Output power	
1050	10 - 50 W
2560	25 - 60 W
2085	20 - 85 W
35105	35 - 105 W
2898	28 - 98 W
56147	56 - 147 W

sales@biontechnologies.com
www.biontechnologies.com
Phone:
(DE) +49 8231 95787 0

All information without guarantee. Errors, changes and misprints excepted.