



linea xc mp

pureColor

Dimensions



Metric:

327 mm, 480 mm, 632 mm, 785 mm, 937 mm, 1090 mm,
1242 mm (X)
49 mm (Y)
58 mm (Z)

Imperial

12.88 in, 18.90 in, 24.89 in, 30.91 in, 36.89 in, 42.92 in,
48.90 in (X)
1.93 Inch (Y)
2.29 Inch (Z)

Technical Data


| | | | |
|--|---|--|------------|
| Glare Protection | No Glare Protection, Honeycomb louver (internal, 6,4mm), Linear louver (internal) | Lumen Maintenance [L70] @ 25 °C | 65,000 XXX |
| Dimming | Integrated interface(s) / control: NDIMtc, 0-10 V, DMX External operating device, e.g. DALI, DMX | Lumen Maintenance [L70] @ 40 °C | 40,000 XXX |
| Housing | Extruded aluminium profile | Impact protection rating | IK08 |
| Housing color | RAL____, (smooth, matt), DB 703 metallic dark grey fine-textured | Electrical data | |
| Lens | Ultra clear, tempered safety glass | Integrated interface(s) / control: NDIMtc, 0-10 V, DMX | |
| Environment | Indoor, Outdoor | Constant voltage | 36 V |
| Ingress protection rating | IP66 | Power Consumption | |
| Humidity | 0 to 95%, non-condensing | 327 mm 12.88 in → 10 W | |
| Ambient temperature (Operation) | -40 °C to 40 °C -40 °F to 104 °F | 480 mm 18.90 in → 15 W | |
| Ambient temperature (Storage) | -25 °C to 80 °C -13 °F to 176 °F | 632 mm 24.89 in → 20 W | |
| Ambient temperature (Start-up process) | -40 °C to 40 °C -40 °F to 104 °F | 785 mm 30.91 in → 25 W | |
| | | 937 mm 36.89 in → 30 W | |
| | | 1090 mm 42.92 in → 35 W | |
| | | 1242 mm 48.90 in → 40 W | |
| | | Protection class | III |
| | | External operating device, e.g. DALI, DMX | |
| | | Constant current | 350 mA |
| | | Power Consumption | |

| | | | | | | |
|---------|--|----------|---|------|--|--------|
| 327 mm | | 12.88 in | → | 11 W | | 30 VDC |
| 480 mm | | 18.90 in | → | 14 W | | 41 VDC |
| 632 mm | | 24.89 in | → | 18 W | | 53 VDC |
| 785 mm | | 30.91 in | → | 22 W | | 64 VDC |
| 937 mm | | 36.89 in | → | 26 W | | 75 VDC |
| 1090 mm | | 42.92 in | → | 30 W | | 86 VDC |
| 1242 mm | | 48.90 in | → | 34 W | | 97 VDC |

| | |
|------------------|---------------------|
| Protection class | II |
| LED-Class | Class 2 LED-Product |
| Approbation | CE, ETL, FCC |

Designed and Developed in Bavaria.
Made in Germany.

Beam Angles

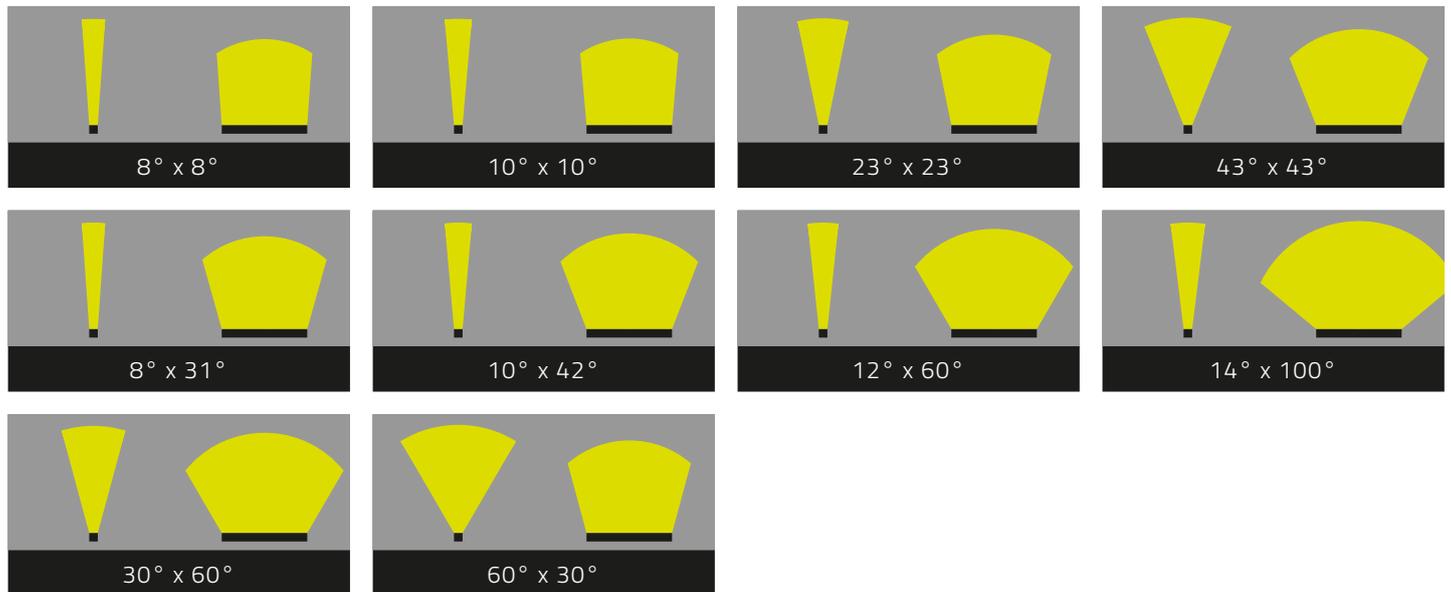

Accessories



| 10 Leader cable length | |
|------------------------|------------------------------|
| ETE | End to end - Leader length |
| 003 | 30 cm (11.8 in) leader cable |
| 006 | 60 cm (23.6 in) leader cable |
| 009 | 90 cm (35.4 in) leader cable |
| 012 | 1,2 m (47.2 in) leader cable |
| 030 | 3 m (118 in) leader cable |

| 11 Mounting | |
|----------------|---|
| BS | Universal mounting bracket (Stainless Steel) |
| BS_----- GM | Universal mounting bracket RAL_-----', (smooth, matt) |
| ND | No bracket |