



linea xs eco

pureWhite

The **linea xs** is an impressive low-voltage member of the **linea family** of linear façade luminaires. It not only offers the usual high lighting technology and versatility in beam angles but also expands these with additional options such as integrable linear louvers or honeycomb louvers, which enable optimal glare control.

The innovative **one-block design** ensures that the housing is made from a single piece, minimizing the number of sealing surfaces and thus reducing potential weak points in the construction.

The use of high-quality materials such as highly refined extruded aluminum profiles and low-iron, pre-stressed glass ensures a long lifespan for the luminaire, even under challenging conditions.

Dimensions



	Metric:
324 mm, 477 mm, 629 mm, 782 mm, 934 mm, 1087 mm, 1239 mm	1239 mm (X)
	46 mm (Y)
	57 mm (Z)
	Imperial:
12.76 in, 18.78 in, 24.77 in, 30.79 in, 36.78 in, 42.80 in, 48.78 in	48.78 in (X)
	1.82 Inch (Y)
	2.25 Inch (Z)

Technical Data

Luminous color	2200 K, 2700 K, 3000 K, 3500 K, 4000 K
Luminous flux	324 mm 12.76 in -> 300 lm 477 mm 18.78 in -> 450 lm 629 mm 24.77 in -> 600 lm 782 mm 30.79 in -> 750 lm 934 mm 36.78 in -> 900 lm 1087 mm 42.80 in -> 1050 lm 1239 mm 48.78 in -> 1200 lm
Number of LED(s)	324 mm 12.76 in -> 8 LEDs 477 mm 18.78 in -> 12 LEDs 629 mm 24.77 in -> 16 LEDs 782 mm 30.79 in -> 20 LEDs 934 mm 36.78 in -> 24 LEDs 1087 mm 42.80 in -> 28 LEDs 1239 mm 48.78 in -> 32 LEDs
Glare Protection	No Glare Protection, Honeycomb louver (internal, 6,4mm), Linear louver (internal)
Dimming	Integrated interface(s) / control: NDIMtc, 0-10 V, DMX External operating device, e.g. DALI, DMX
Housing	Extruded aluminium profile
Housing color	Aluminium anodized, Black anodized
Lens	Ultra clear, tempered safety glass

Weight	324 mm 12.76 in -> 1.0 kg 2.3 lb 477 mm 18.78 in -> 1.6 kg 3.6 lb 629 mm 24.77 in -> 2.1 kg 4.7 lb 782 mm 30.79 in -> 2.7 kg 6.0 lb 934 mm 36.78 in -> 3.2 kg 7.1 lb 1087 mm 42.80 in -> 3.8 kg 8.4 lb 1239 mm 48.78 in -> 4.3 kg 9.5 lb The weight of the fixture can vary depending on the configuration!
--------	--

Environment	Indoor, Outdoor
Ingress protection rating	IP66
Humidity	0 to 95%, non-condensing
Ambient temperature (Operation)	-40 °C - 40 °C -40 °F - 104 °F
Ambient temperature (Storage)	-40 °C - 80 °C -40 °F - 176 °F
Ambient temperature (Start-up process)	-25 °C - 40 °C -13 °F - 104 °F
Lumen Maintenance [L70] @ 25 °C	65.000 XXX
Lumen Maintenance [L70] @ 40 °C	40.000 XXX
Impact protection rating	IK08

Electrical data


Integrated interface(s) / control: NDIMtc, 0-10 V, DMX	
Constant voltage	36 V
Power Consumption	324 mm 12.76 in -> 5 W
	477 mm 18.78 in -> 7 W
	629 mm 24.77 in -> 10 W
	782 mm 30.79 in -> 12 W
	934 mm 36.78 in -> 15 W
	1087 mm 42.80 in -> 17 W
1239 mm 48.78 in -> 20 W	
Protection class	III
External operating device, e.g. DALI, DMX	
Constant current	208 mA
Power Consumption	324 mm 12.76 in -> 6 W 29 VDC
	477 mm 18.78 in -> 8 W 40 VDC
	629 mm 24.77 in -> 11 W 51 VDC
	782 mm 30.79 in -> 13 W 62 VDC
	934 mm 36.78 in -> 15 W 73 VDC
	1087 mm 42.80 in -> 17 W 83 VDC
	1239 mm 48.78 in -> 20 W 94 VDC
Protection class	II
LED-Class	Class 2 LED-Product

Approbation



CE, ETL, FCC

Designed and Developed in Bavaria.
Made in Germany.

Beam Angles

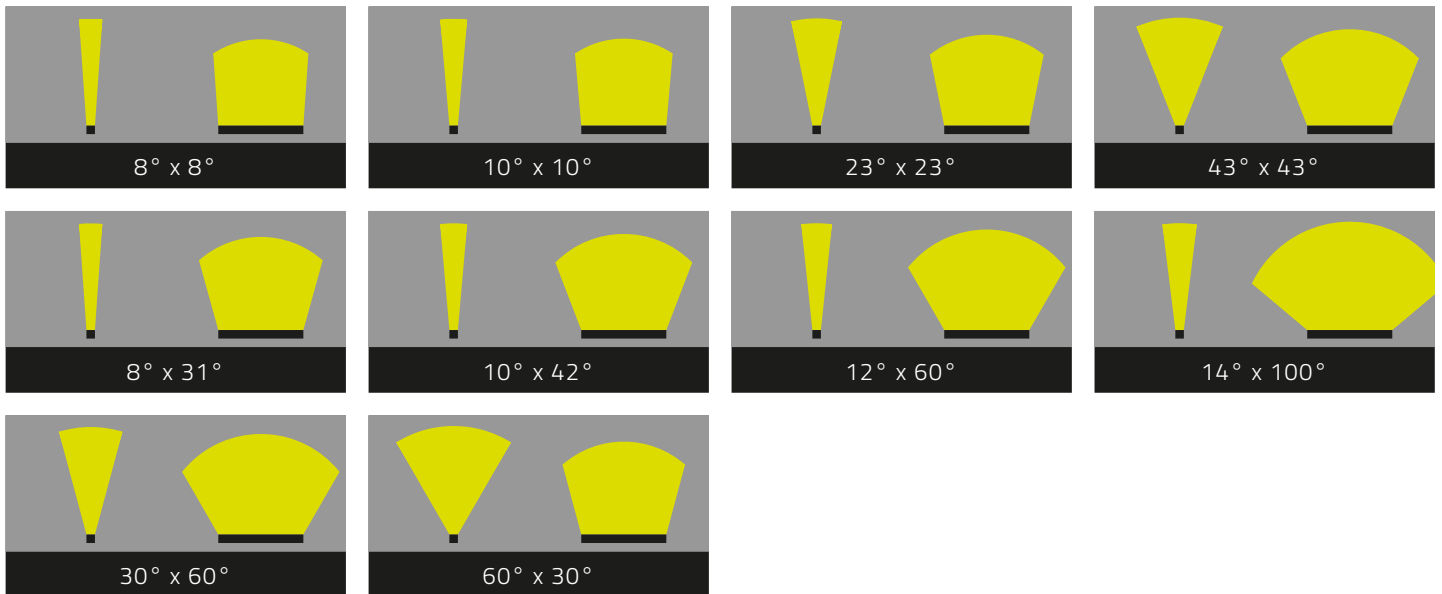

Accessories

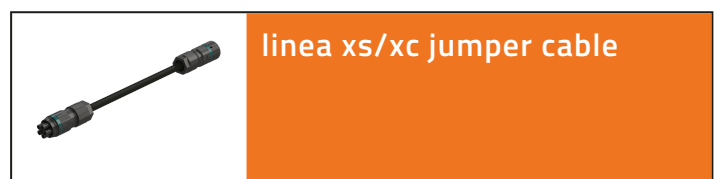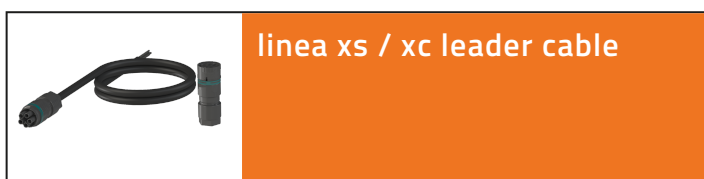



Configurator

1
2
3
4
5
6
7
8
9
10

Product Code: LIN-XS-ECO - _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____

11 _____ -Y01

1 Luminous color	
PW8322	pW 2200 K / 3 SDCM / CRI > 80
PW8327	pW 2700 K / 3 SDCM / CRI > 80
PW8330	pW 3000 K / 3 SDCM / CRI > 80
PW8335	pW 3500 K / 3 SDCM / CRI > 80
PW8340	pW 4000 K / 3 SDCM / CRI > 80

2 Dimming	
NDIMTC	NDIMtc
010V	0-10 V
DMX	DMX
EXT	External operating device, e.g. DALI, DMX

3 Dimension	
324	324 mm / 12.76 in
477	477 mm / 18.78 in
629	629 mm / 24.76 in
782	782 mm / 30.79 in
934	934 mm / 36.77 in
1087	1087 mm / 42.80 in
1239	1239 mm / 48.78 in

4 Beam Angle	
8X8	8° x 8°
10X10	10° x 10°
23X23	23° x 23°
43X43	43° x 43°
8X31	8° x 31°
10X42	10° x 42°
12X60	12° x 60°
14X100	14° x 100°
30X60	30° x 60°
60X30	60° x 30°

5 Housing color	
AA	Aluminium anodized
BA	Black anodized

6 Glare Protection	
OP	No Glare Protection
HL64	Honeycomb louver (internal, 6,4mm)
LL0	Linear louver (internal)

7 Approbation	
CE	European Union
ETL	North America

8 Wiring configuration	
IOCC	IN/OUT with Connector
IXCX	only IN with Connector
I000	IN/OUT with open ends
IOOC	IN open end / OUT socket
IXOX	only IN with open ends

9 Luminaire circuit	
PD	Power-Data
C1	Circuit 1
C2	Circuit 2

10 Leader cable length	
ETE	End to end - Leader length
003	30 cm (11.8 in) leader cable
006	60 cm (23.6 in) leader cable
009	90 cm (35.4 in) leader cable
012	1,2 m (47.2 in) leader cable

11 Mounting	
BS	Universal mounting bracket
FX015	Fix 0° -15°, SW 5°
ND	without bracket