

# linea xs in-ground eco

*pureColor*

Linea xs inground not only seamlessly fits into the linea xs family with the same outstanding standard of the highest quality lighting technology and versatility in beam angles but also extends the family with the possibility of lighting facades or similar from the ground.

One-Block Design is an innovative concept in which the housing is manufactured from a single part. This reduces the number of sealing surfaces, which are possible weak points in the housing construction, to a minimum. The housing is manufactured from selected materials such as highly finished extruded aluminium profile and low-iron oxide tempered glass, which ensures a long lifetime of the luminaire even in the most adverse environments.

## Dimensions



<b>Metric:</b>
629 mm, 934 mm, 1239 mm (X)
46 mm (Y)
74 mm (Z)
<b>Imperial</b>
24.77 in, 36.78 in, 48.78 in (X)
1.82 Inch (Y)
2.92 Inch (Z)

## Technical Data

Luminous color	Amber, Rot, Grün, Blau
Glare Protection	No Glare Protection, Honeycomb louver (internal, 6,4mm), Linear louver (internal)
Dimming	Integrated interface(s) / control: 0-10 V, DMX External operating device, e.g. DALI, DMX
Housing	Extruded aluminium profile
Lens	Ultra clear, tempered safety glass
Load	500 kg
Environment	Indoor, Outdoor
Ingress protection rating	IP67
Humidity	0 to 95%, non-condensing
Ambient temperature (Operation)	-40 °C - 40 °C   -40 °F - 104 °F
Ambient temperature (Storage)	-40 °C - 80 °C   -40 °F - 176 °F
Ambient temperature (Start-up process)	-25 °C - 40 °C   -13 °F - 104 °F
Lumen Maintenance [L70] @ 25 °C	65.000 XXX

Lumen Maintenance [L70] @ 40 °C	40.000 XXX
Impact protection rating	IK09


### Electrical data

Integrated interface(s) / control: 0-10 V, DMX	
Constant voltage	36 V
Power Consumption	629 mm   24.77 in -> 10 W 934 mm   36.78 in -> 15 W 1239 mm   48.78 in -> 20 W
Protection class	III
External operating device, e.g. DALI, DMX	
Constant current	208 mA
Power Consumption	629 mm   24.77 in -> 11 W   51 VDC 934 mm   36.78 in -> 15 W   73 VDC 1239 mm   48.78 in -> 20 W   94 VDC
Protection class	II

LED-Class	Class 2 LED-Product
Approbation	ETL, CE, FCC

Designed and Developed in Bavaria.  
Made in Germany.

**Beam Angles**

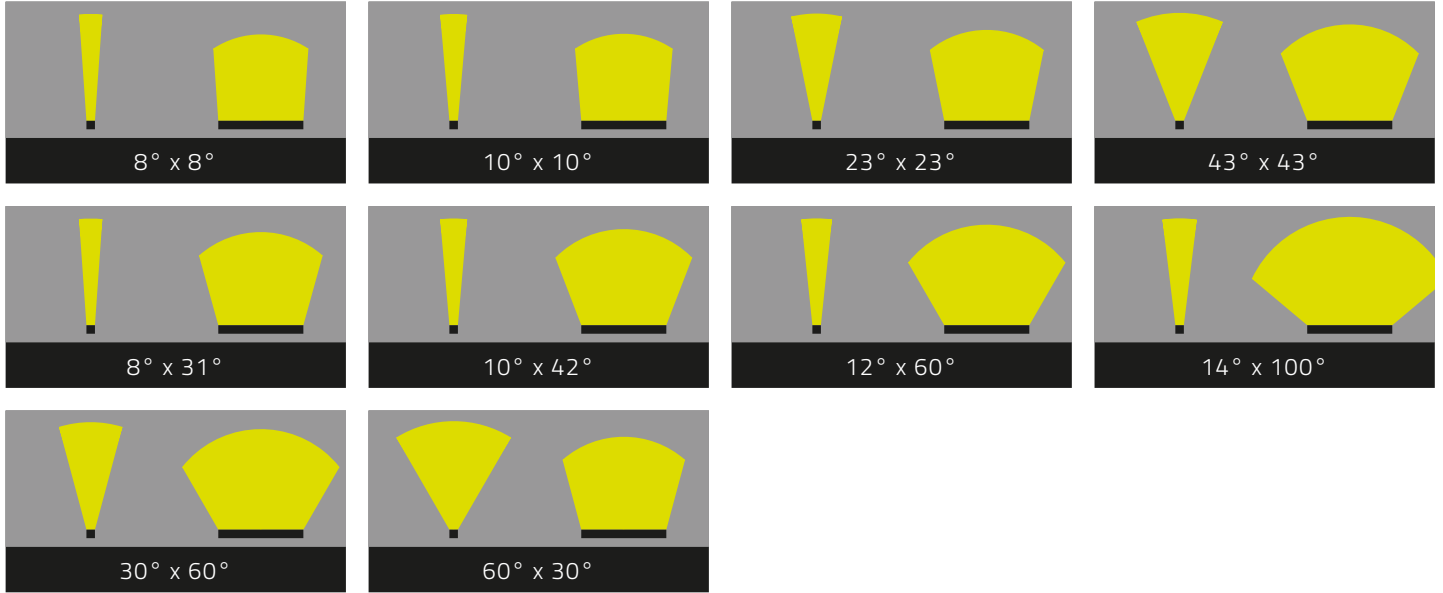

**Accessories**



## Configurator

1
2
3
4
5
6
7
8

Product Code: LIN-XS-IN-ECO - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ -Y01

1 Luminous color	
PCAM	Amber
PCRE	Red
PCGR	Green
PCBL	Blue

2 Dimming	
010V	0-10 V
DMX	DMX
EXT	External operating device, e.g. DALI, DMX

3 Dimension	
629	629 mm / 24.76 in
934	934 mm / 36.77 in
1239	1239 mm / 48.78 in

4 Beam Angle	
8X8	8° x 8°
10X10	10° x 10°
23X23	23° x 23°
43X43	43° x 43°
8X31	8° x 31°
10X42	10° x 42°
12X60	12° x 60°
14X100	14° x 100°
30X60	30° x 60°
60X30	60° x 30°

5 Glare Protection	
OP	No Glare Protection
HL64	Honeycomb louver (internal, 6,4mm)
LL0	Linear louver (internal)

6 Approbation	
CE	European Union
ETL	North America

7 Wiring configuration	
I000	IN/OUT with open ends
IXOX	only IN with open end

8 Luminaire circuit	
PD	Power-Data
C1	Circuit 1
C2	Circuit 2