



Linea xs inground not only seamlessly fits into the linea xs family with the same outstanding standard of the highest quality lighting technology and versatility in beam angles but also extends the family with the possibility of lighting facades or similar from the ground.

One-Block Design is an innovative concept in which the housing is manufactured from a single part. This reduces the number of sealing surfaces, which are possible weak points in the housing construction, to a minimum. The housing is manufactured from selected materials such as highly finished extruded aluminium profile and low-iron oxide tempered glass, which ensures a long lifetime of the luminaire even in the most adverse environments.

linea xs inground mp pureWhite

Dimensions



Metric:

629 mm, 934 mm, 1239 mm (X)

46 mm (Y)

74 mm (Z)

Imperial 24.77 in, 36.78 in, 48.78 in (X)

1.82 Inch (Y)

2.92 Inch (Z)

Technical Data

Luminous color	2200 K, 2700 K, 3000 K, 3500 K, 4000 K
Luminous flux	629 mm 24.77 in -> max. 1186 lm 934 mm 36.78 in -> max. 1779 lm 1239 mm 48.78 in -> max. 2372 lm
Number of LED(s)	629 mm 24.77 in -> 8 LEDs 934 mm 36.78 in -> 16 LEDs 1239 mm 48.78 in -> 24 LEDs
Glare Protection	No Glare Protection, Honeycomb louver (internal, 6,4mm), Linear louver (internal)
Dimming	Integrated interface(s) / control: 0-10 V, DMX
	External operating device, e.g. DALI, DMX
Housing	Extruded aluminium profile
Lens	Ultra clear, tempered safety glass
Load	500 kg 1103 lb
Environment	Indoor, Outdoor
Ingress protection rating	IP67
Humidity	0 to 95%, non-condensing
Ambient temperature (Operation)	-40 °C to 40 °C -40 °F to 104 °F

Ambient temperature (Storage)	-40 °C to 80 °C -40 °F to 176 °F
Ambient temperature (Start-up process)	-25 °C to 40 °C -13 °F to 104 °F
Lumen Maintenance [L70] @ 25 °C	65,000 XXX
Lumen Maintenance [L70] @ 40 °C	40,000 XXX
Impact protection rating	IK09
Electrical data	
Integrated interface(s)	/ control: 0-10 V, DMX
Constant voltage	36 V
Power Consumption	
	629 mm 24.77 in -> max. 20 W 934 mm 36.78 in -> max. 30 W 1239 mm 48.78 in -> max. 40 W
Protection class	III
External operating dev	ice, e.g. DALI, DMX
Constant current	350 mA
Power Consumption	
934 m	nm 24.77 in -> max. 18 W 53 VDC nm 36.78 in -> max. 26 W 75 VDC nm 48.78 in -> max. 34 W 97 VDC





linea xs inground mp pureWhite


Protection class II

LED-ClassClass 2 LED-ProductApprobationETL, CE, FCC

Designed and Developed in Bavaria.

Made in Germany.

Beam Angles

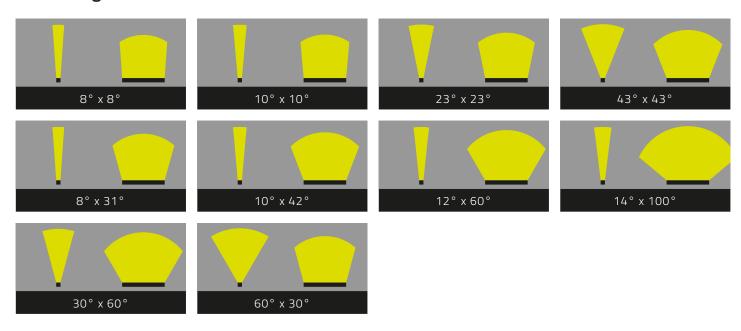

Accessories









linea xs inground mp pureWhite

Configurator



1 Lumino	ous color
PW8322	pW 2200 K / 3 SDCM / CRI > 80
PW8327	pW 2700 K / 3 SDCM / CRI > 80
PW8330	pW 3000 K / 3 SDCM / CRI > 80
PW8335	pW 3500 K / 3 SDCM / CRI > 80
PW8340	pW 4000 K / 3 SDCM / CRI > 80

2 Dimming	
010V	0-10 V
DMX	DMX
EXT	External operating device, e.g. DALI, DMX

3 Dimen	sion
629	629 mm / 24.76 in
934	934 mm / 36.77 in
1239	1239 mm / 48.78 in

4 Beam	Angle
8X8	8° x 8°
10X10	10° x 10°
23X23	23° x 23°
43X43	43° x 43°
8X31	8° x 31°
10X42	10° x 42°
12X60	12° x 60°
14X100	14° x 100°
30X60	30° x 60°
60X30	60° x 30°

5 Glare Protection	
OP	No Glare Protection
HL64	Honeycomb louver (internal, 6,4mm)
LLO	Linear louver (internal)

6 Approbation	
CE	European Union
ETL	North America

7 Wiring	configuration
1000	IN/OUT with open ends
IXOX	only IN with open end

8 Luminaire circuit		
PD	Power-Data	
C1	Circuit 1	
C2	Circuit 2	