




murus m

pureWhite

Dimensions

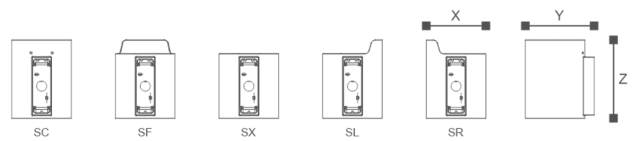

Metric:
130 x 150 x 170 mm [X x Y x Z]
Imperial
5.12 x 5.91 x 6.70 in [X x Y x Z]

Technical Data

Luminous color	2700 K, 3000 K, 4000 K
Luminous flux	600 lm
Number of LED(s)	1 LED
Glare Protection	Honeycomb louver (internal, 6,4mm), Linear louver 0° (internal)
Dimming	Integrated interface(s) / control: 0-10 V, DALI, DMX, IoT External operating device, e.g. DALI, DMX
Housing	Aluminium die casting
Housing color	DB 703 metallic dark grey fine-textured, RAL 9003 Signal white fine-textured matt, RAL 9005 Jet black, fine-textured matt, RAL____,(fine-textured, matt), RAL____, (smooth, matt)
Lens	Ultra clear, tempered safety glass
Environment	Indoor, Outdoor
Ingress protection rating	IP66
Humidity	0 to 95%, non-condensing
Ambient temperature (Operation)	-40 °C - 40 °C -40 °F - 104 °F
Ambient temperature (Storage)	-40 °C - 80 °C -40 °F - 176 °F
Ambient temperature (Start-up process)	-25 °C - 40 °C -13 °F - 104 °F
Lumen Maintenance [L70] @ 25 °C	65.000 h

Lumen Maintenance [L70] @ 40 °C	40.000 h
Impact protection rating	IK08

Electrical data

Integrated interface(s) / control: 0-10 V, DALI, DMX, IoT	
Internal power supply	100 - 240, 277 VAC (50 - 60 Hz) 127 - 431 VDC
Power Consumption	7 W
Protection class	I
External operating device, e.g. DALI, DMX	
Constant current	500 mA
Power Consumption	7 W x VDC
Protection class	III

LED-Class	Class 2 LED-Product
Approbation	CE

Designed and Developed in Bavaria.
Made in Germany.

Beam Angles

