


murus m
pureWhite

Dimensions

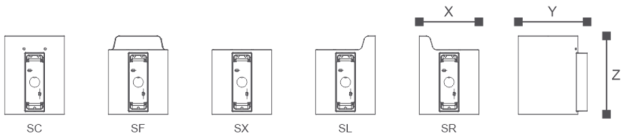

Metric:
130 x 150 x 170 mm [X x Y x Z]
Imperial
5.12 x 5.91 x 6.70 in [X x Y x Z]

Technical Data

Luminous color	2700 K, 3000 K, 4000 K
Luminous flux	max. 600 lm
Number of LED(s)	1 LED
Glare Protection	Honeycomb louver (internal, 6,4mm), Linear louver 0° (internal)
Dimming	Integrated interface(s) / control: 0-10 V, DALI, DMX, IoT External operating device, e.g. DALI, DMX
Housing	Aluminium die casting
Housing color	DB 703 metallic dark grey fine-textured, RAL 9003 Signal white fine-textured matt, RAL 9005 Jet black, fine-textured matt, RAL_ _ _ _,(fine-textured, matt), RAL_ _ _ _, (smooth, matt)
Lens	Ultra clear, tempered safety glass
Environment	Indoor, Outdoor
Ingress protection rating	IP66
Humidity	0 to 95%, non-condensing
Ambient temperature (Operation)	-40 °C to 40 °C | -40 °F to 104 °F
Ambient temperature (Storage)	-40 °C to 80 °C | -40 °F to 176 °F
Ambient temperature (Start-up process)	-25 °C to 40 °C | -13 °F to 104 °F
Lumen Maintenance [L70] @ 25 °C	65,000 h
Lumen Maintenance [L70] @ 40 °C	40,000 h

Impact protection rating	IK08
Electrical data	
Integrated interface(s) / control: 0-10 V, DALI, DMX, IoT	
Internal power supply	100 - 240, 277 VAC (50 - 60 Hz)
Power Consumption	7 W
Protection class	I
External operating device, e.g. DALI, DMX	
Constant current	500 mA
Power Consumption	7 W | x VDC
Protection class	III
LED-Class	Class 2 LED-Product
Approbation	CE


Designed and Developed in Bavaria.
Made in Germany.

sales@biontechnologies.com
www.biontechnologies.com

Phone:
(DE) +49 8231 95787 0

All information without guarantee. Errors, changes and misprints excepted.

Beam Angles

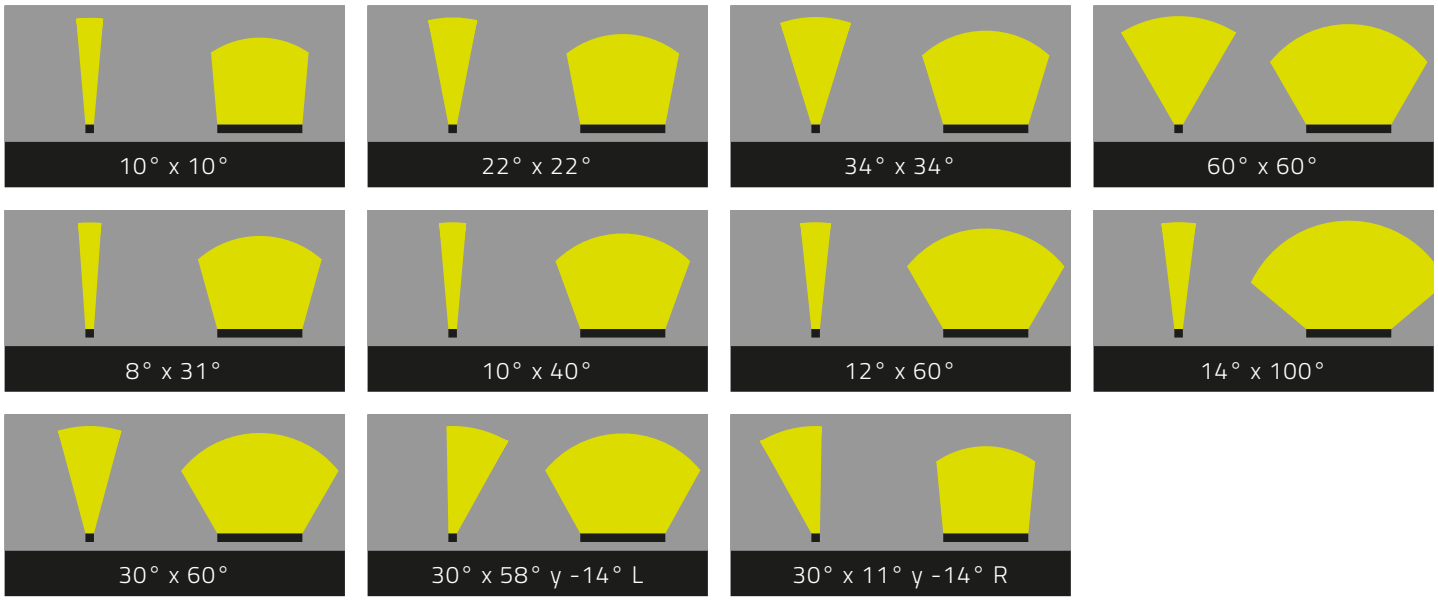

sales@biontechnologies.com
www.biontechnologies.com

Phone:
(DE) +49 8231 95787 0

All information without guarantee. Errors, changes and misprints excepted.

Configurator

MUR-M -(1)_____-(2)_____-(3)_____-(4)_____-(5)_____-(6)_____-(7)_____-Y01

1 Housing design	
SC	Snoot 360°
SF	Snoot front
SL	Snoot Left
SR	Snoot Right
SX	No snoot

2 Luminous color	
PW8327	pW 2700 K / 3 SDCM / CRI > 80
PW8330	pW 3000 K / 3 SDCM / CRI > 80
PW8340	pW 4000 K / 3 SDCM / CRI > 80

3 Dimming	
010V	0-10 V
DALI	DALI
DMX	DMX
IOT	IoT
EXT	External operating device, e.g. DALI, DMX

4 Approbation	
CE	European Union

5 Beam Angle	
10X10	10° x 10°
22X22	22° x 22°
34X34	34° x 34°
60X60	60° x 60°
8X31	8° x 31°
10X40	10° x 40°
12X60	12° x 60°
14X100	14° x 100°
30X60	30° x 60°
30X58Y -14L	30° x 58° y -14° L
30X11Y -14R	30° x 11° y -14° R

6 Glare Protection	
OP	No Glare Protection
HL64	Honeycomb louver (internal, 6,4mm)
LL00	Linear louver 0° (internal)

7 Housing color	
DB703	DB 703 metallic dark grey fine-textured
R9003FM	RAL 9003 Signal white fine-textured matt
R9005FM	RAL 9005 Jet black, fine-textured matt
R____FM	RAL____,(fine-textured, matt)
R____SM	RAL____, (smooth, matt)

sales@biontechnologies.com
www.biontechnologies.com

Phone:
(DE) +49 8231 95787 0

All information without guarantee. Errors, changes and misprints excepted.