

tantulus xhp

tunableWhite

Dimensions



	Metric:
310 mm, 615 mm, 920 mm, 1225 mm, 1530 mm, 1835 mm (X)	
	23 mm (Y)
	19 mm (Z)
	Imperial
12.21 in, 24.22 in, 36.23 in, 48.23 in, 60.24 in, 72.25 in (X)	
	0.91 Inch (Y)
	0.75 Inch (Z)


Technical Data

Dimming	External operating device, e.g. DALI, DMX
Housing	Extruded aluminium profile
Lens	PMMA
Environment	Indoor
Ingress protection rating	IP20
Humidity	0 to 95%, non-condensing
Ambient temperature (Operation)	5 °C - 40 °C 41 °F - 104 °F
Ambient temperature (Storage)	5 °C - 40 °C 41 °F - 104 °F
Ambient temperature (Start-up process)	5 °C - 40 °C 41 °F - 104 °F
Lumen Maintenance [L70] @ 25 °C	65.000 h
Lumen Maintenance [L70] @ 40 °C	40.000 h
Impact protection rating	IK02
Electrical data	
External operating device, e.g. DALI, DMX	
External Powersupply: Constant voltage 36 V	
Power Consumption	310 mm 12.21 in -> 6 W 615 mm 24.22 in -> 13 W

	920 mm 36.23 in -> 19 W
	1225 mm 48.23 in -> 26 W
	1530 mm 60.24 in -> 32 W
	1835 mm 72.25 in -> 39 W
Protection class	III
LED-Class	Class 2 LED-Product
Approbation	CE, FCC, ETL

Designed and Developed in Bavaria.
Made in Germany.

Beam Angles

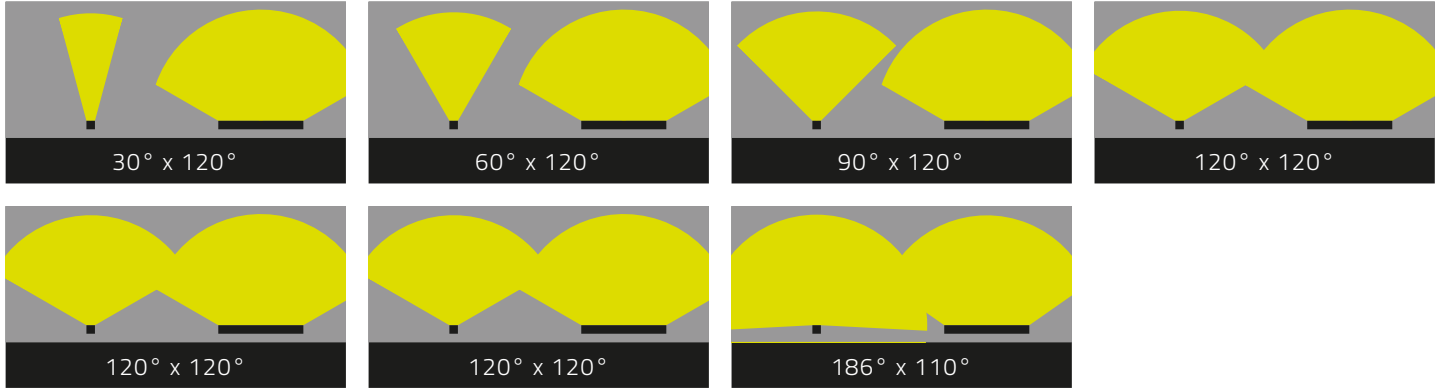

Configurator

1
2
3
4

Product Code: TAN-XHP - _____ - _____ - _____ - _____ -Y04

1 Luminous color

2 Dimension

3 Beam Angle

310	310 mm / 12.20 in
615	615 mm / 24.21 in
920	920 mm / 36.22 in
1225	1225 mm / 48.23 in
1530	1530 mm / 60.24 in
1835	1835 mm / 72.24 in

30X120	30° x 120° frost (F)
60X120	60° x 120° frost (F)
90X120	90° x 120° frost (F)
120X12	120° x 120° klar O(C)
120X12	120° x 120° frost O(F)
120X12	120° x 120° weiß O(W)
SQR(W)	186° x 100° weiß

4 Mounting

K0	Bracket Set 0°
K15	Bracket Set 15°
K30	Bracket Set 30°
K45	Bracket Set 45°
K60	Bracket Set 60°
KADJ	Positioning Hinge