




tellus m installation housing

The recessed floor housing, made of high-quality aluminum extrusion profile (EN AW 6060), features an anodized finish and offers a durable solution for indoor and outdoor use. Specifically designed for the **tellus m** and **tellus point** recessed floor lights, it allows for flexible installation in various lengths – perfect for any project.

Dimensions

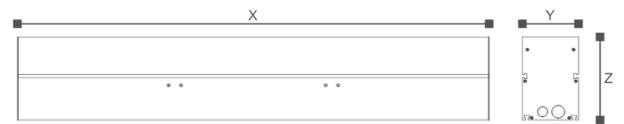

Metric:

115 mm, 225 mm, 273 mm, 350 mm, 655 mm, 960 mm,
1265 mm (X)
114 mm (Y)
170 mm (Z)

Imperial

4.53 in, 8.86 in, 10.75 in, 13.78 in, 25.79 in, 37.80 in,
49.81 in (X)
4.49 Inch (Y)
6.70 Inch (Z)

Technical Data

Material Aluminum extruded profile (EN AW 6060)

Accessories

Housing Color Aluminium anodized

Load 500 kg | 1103 lb

Environment **Gel-filled cable joint** Indoor, Outdoor

Approval CE, ETL

Weight  350 mm | 13.78 in → 2.1 kg | 4.7 lb
655 mm | 25.79 in → 3.8 kg | 8.4 lb
960 mm | 37.80 in → 5.5 kg | 12.2 lb

1265 mm | 49.81 in → 7.2 kg | 15.9 lb

The weight of the fixture can vary depending on the configuration!

Designed and Developed in Bavaria.
Made in Germany.

Configurator



TEL-M-INBX - _____ -Y02

1 Dimension	
115	115 mm / 4.53 in
225	225 mm / 8.86 in
273	273 mm / 10.75 in
350	350 mm / 13.78 in
655	655 mm / 25.79 in
960	960 mm / 37.80 in
1265	1265 mm / 49.80 in