




tellus m installation housing

The recessed floor housing, made of high-quality aluminum extrusion profile (EN AW 6060), features an anodized finish and offers a durable solution for indoor and outdoor use. Specifically designed for the **tellus m** and **tellus point** recessed floor lights, it allows for flexible installation in various lengths – perfect for any project.

Dimensions

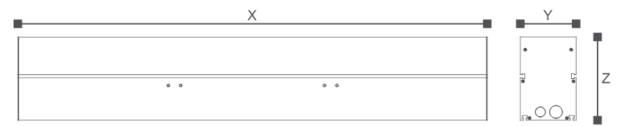

- Metric:**
115 mm, 225 mm, 273 mm, 350 mm, 655 mm, 960 mm,
1265 mm (X)
114 mm (Y)
170 mm (Z)
- Imperial**
4.53 in, 8.86 in, 10.75 in, 13.78 in, 25.79 in, 37.80 in,
49.81 in (X)
4.49 Inch (Y)
6.70 Inch (Z)

Technical Data

Material Aluminum extruded profile (EN AW 6060)

Accessories

Housing Color Aluminium anodized

Load 500 kg | 1103 lb

Environment Indoor, Outdoor

Approvals CE, ETL

Weight 350 mm | 13.78 in -> 2.1 kg | 4.7 lb

655 mm | 25.79 in -> 3.8 kg | 8.4 lb

960 mm | 37.80 in -> 5.5 kg | 12.2 lb

1265 mm | 49.81 in -> 7.2 kg | 15.9 lb

The weight of the fixture can vary depending on the configuration!

Designed and Developed in Bavaria.

Made in Germany.

Configurator

Product Code: TEL-M-INBX - **1** -Y02

1 Dimension

115	115 mm / 4.53 in
225	225 mm / 8.86 in
273	273 mm / 10.75 in
350	350 mm / 13.78 in
655	655 mm / 25.79 in
960	960 mm / 37.80 in
1265	1265 mm / 49.80 in