


tellus m eco

Color Changing

The **tellus m eco** is a sustainable inground lighting fixture specifically designed for sophisticated façade and architectural lighting. With a variety of **precisely calibrated beam angles**, including asymmetric and wall-wash optics, it offers maximum flexibility for customized lighting designs. From highlighting architectural details to delivering even wall-wash effects for full façade illumination, **the tellus m eco meets every requirement**. It combines high energy efficiency with a robust outdoor design, making it the ideal choice for environmentally conscious projects that demand durability and minimal energy consumption.

Dimensions

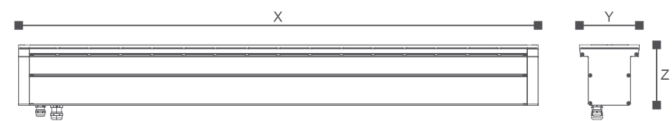

	Metric:
345 mm, 650 mm, 955 mm, 1260 mm (X)	110 mm (Y)
	110 mm (Z)
	Imperial
13.59 in, 25.60 in, 37.60 in, 49.61 in (X)	4.34 Inch (Y)
	4.34 Inch (Z)

Technical Data


Luminous color	RGBW3000K, RGBW4000K
Luminous flux	min. 2044 lm/m min. 623 lm/ft
Number of LED(s)	345 mm 13.59 in -> 8 LEDs 650 mm 25.60 in -> 16 LEDs 955 mm 37.60 in -> 24 LEDs 1260 mm 49.61 in -> 32 LEDs
Glare Protection	Honeycomb louver (internal, 6,4mm), Linear louver 0° (internal), Linear louver 17° (internal)
Dimming	Integrated interface(s) / control: DALI, DMX, IOT
Housing	Extruded aluminium profile
Lens	Ultra clear, tempered safety glass
Frame	Stainless steel
Load	500 kg
Weight	345 mm 13.59 in -> 4.5 kg 10.0 lb 650 mm 25.60 in -> 7.5 kg 16.6 lb 955 mm 37.60 in -> 10.5 kg 23.2 lb 1260 mm 49.61 in -> 14.0 kg 30.9 lb The Weight of the fixture can vary depending on the configuration!
Environment	Indoor, Outdoor
Ingress protection rating	IP67

Humidity	0 to 95%, non-condensing
Ambient temperature (Operation)	-40 °C - 40 °C -40 °F - 104 °F
Ambient temperature (Storage)	-40 °C - 80 °C -40 °F - 176 °F
Ambient temperature (Start-up process)	-25 °C - 40 °C -13 °F - 104 °F
Lumen Maintenance [L70] @ 25 °C	65.000 h
Lumen Maintenance [L70] @ 40 °C	40.000 h
Impact protection rating	IK09

Electrical data	Integrated interface(s) / control: DALI, DMX, IOT Internal power supply 100 - 240, 277 VAC (50 - 60 Hz) 127 - 431 VDC
Power Consumption	345 mm 13.59 in -> 14 W 650 mm 25.60 in -> 28 W 955 mm 37.60 in -> 42 W 1260 mm 49.61 in -> 56 W
Protection class	I
LED-Class	Class 2 LED-Product
Approbation	CE, ETL, FCC

Designed and Developed in Bavaria.
Made in Germany.

Beam Angles

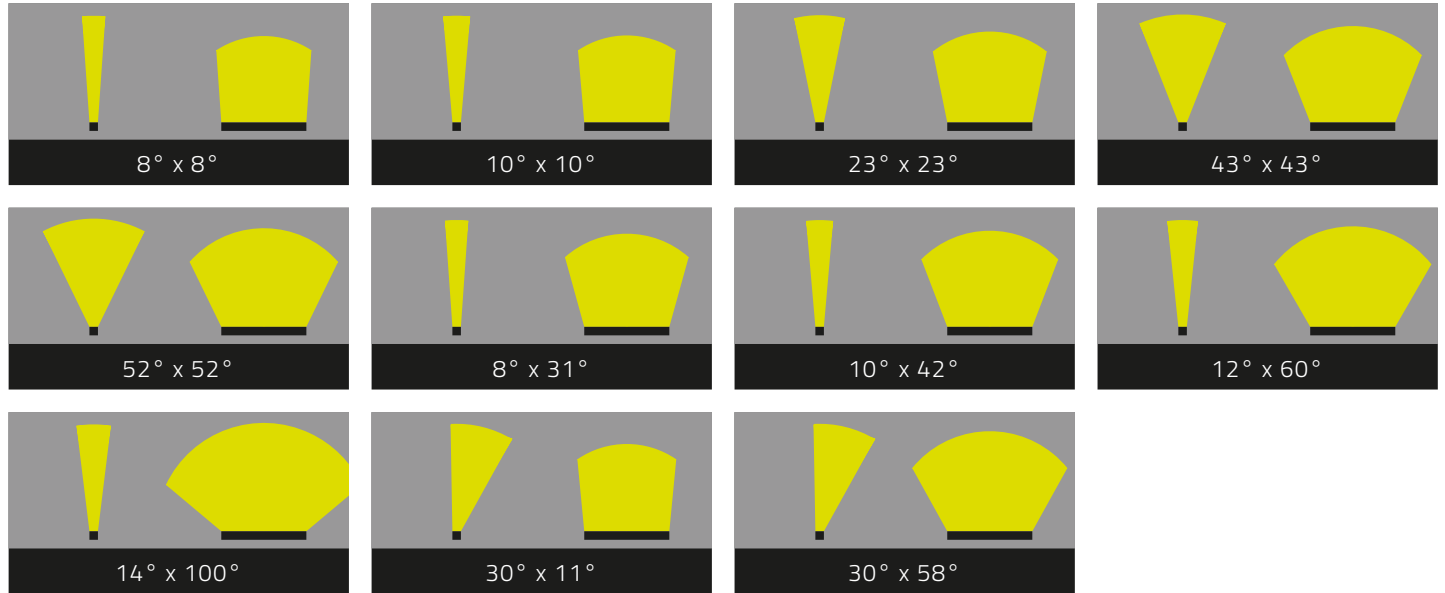

Configurator



Product Code: TEL-M-ECO - _____ - _____ - _____ - _____ - _____ - _____ -Y03

1 Luminous color	
RGBW83 30	RGBW3000 K / 3 SDCM / CRI > 80
RGBW83 40	RGBW4000 K / 3 SDCM / CRI > 80

2 Dimming	
DALI	DALI
DMX	DMX
IOT	IOT

3 Dimension	
345	345 mm / 13.58 in
650	650 mm / 25.59 in
955	955 mm / 37.60 in
1260	1260 mm / 49.61 in

4 Beam Angle	
8X8	8° x 8°
10X10	10° x 10°
23X23	23° x 23°
43X43	43° x 43°
52X52	52° x 52°
8X31	8° x 31°
10X42	10° x 42°
12X60	12° x 60°
14X100	14° x 100°
30X11Y 14L	30° x 11° y 14° L
30X58Y 14L	30° x 58° y 14° L

5 Approbation	
CE	European Union
ETL	North America

6 Glare Protection	
OP	No Glare Protection
HL64	Honeycomb louver (internal, 6,4mm)
LL00	Linear louver 0° (internal)
LL17	Linear louver 17° (internal)