

# tellus point hpq

*pureWhite*


The **tellus point** stands out for its exceptional light output in an ultra-compact design, setting new benchmarks in the field of recessed ground lights. With color rendering values exceeding 80 and sometimes surpassing 95, it ensures natural and precise color representation. Thanks to a variety of beam angles and effective glare reduction via optional honeycomb structures or linear grids, it offers maximum flexibility and optimal visual comfort, making it ideal for diverse and demanding lighting projects.

- ➔ **Compact Dimensions:** 110 mm (XS), 220 mm (S), 268 mm (M)
- ➔ **Color Temperature:** TunableWhite (2700 K – 4000 K)
- ➔ **Beam Angles:** From precise 8° to wide wall-wash optics
- ➔ **Luminous Flux:** Up to 1650 lm (depending on the model)
- ➔ **Control Options:** DMX, DALI, IoT
- ➔ **Protection Class:** IP67, IK09 (shock-resistant), withstands pressure up to 500 kg

The **tellus point** also impresses with premium craftsmanship: an extruded aluminum profile, tempered safety glass, and a stainless steel frame ensure durability and resilience, even in challenging conditions.

Whether for architectural highlights or functional lighting, the **tellus point** delivers outstanding results with top-tier efficiency.

## Dimensions

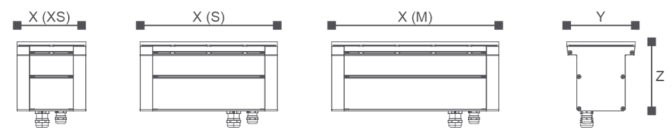

- Metric:**  
110 mm, 220 mm, 268 mm (X)  
110 mm (Y)  
110 mm (Z)
- Imperial:**  
4.34 in, 8.67 in, 10.56 in (X)  
4.34 Inch (Y)  
4.34 Inch (Z)

## Technical Data


Luminous color	2700 K, 3000 K, 3500 K, 4000 K	Environment	Indoor, Outdoor
Luminous flux	110 mm   4.34 in -> 550 lm 220 mm   8.67 in -> 1100 lm 268 mm   10.56 in -> 1650 lm	Ingress protection rating	IP67
Number of LED(s)	110 mm   4.34 in -> 1 LED(s) 220 mm   8.67 in -> 2 LED(s) 268 mm   10.56 in -> 3 LED(s)	Humidity	0 to 95%, non-condensing
Glare Protection	No Glare Protection, Honeycomb louver (internal, 6,4mm), Linear louver 0° (internal), Linear louver 17° (internal)	Ambient temperature (Operation)	-40 °C - 40 °C   -40 °F - 104 °F
Dimming	Integrated interface(s) / control: 0-10 V, DALI, DMX, IoT	Ambient temperature (Storage)	-40 °C - 80 °C   -40 °F - 176 °F
Housing	Extruded aluminium profile	Ambient temperature (Start-up process)	-25 °C - 40 °C   -13 °F - 104 °F
Frame	Stainless steel	Lumen Maintenance [L70] @ 25 °C	65.000 XXX
Lens	Ultra clear, tempered safety glass	Lumen Maintenance [L70] @ 40 °C	40.000 XXX
Load	500 kg	Impact protection rating	IK09

Electrical data

Integrated interface(s) / control: 0-10 V, DALI, DMX, IoT	
Internal power supply	100 - 240, 277 VAC (50 - 60 Hz)   127 - 431 VDC
Power Consumption	110 mm   4.34 in -> 7 W 220 mm   8.67 in -> 14 W 268 mm   10.56 in -> 21 W
Protection class	I
Inrush @ 230 V	70 A (Coldstart, $t_{width} = 120 \mu s$ measured at 50% $I_{peak}$ )
LED-Class	Class 2 LED-Product
Approbation	CE, ETL, FCC

Designed and Developed in Bavaria.  
Made in Germany.

**Beam Angles**

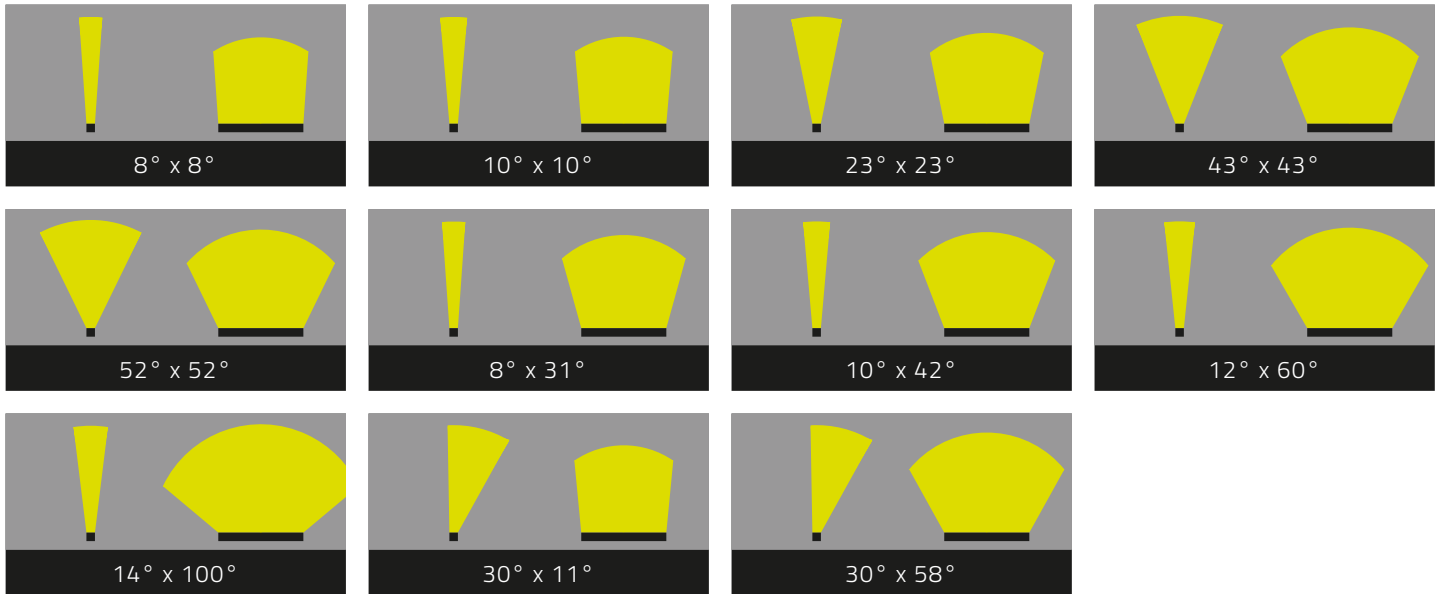

**Accessories**



## Configurator



Product Code: TEL-PO-HPQ -      -      -      -      -      -      -      -Y01

1 Luminous color	
PW8327	pW 2700 K / 3 SDCM / CRI > 80
PW8330	pW 3000 K / 3 SDCM / CRI > 80
PW8335	pW 3500 K / 3 SDCM / CRI > 80
PW8340	pW 4000 K / 3 SDCM / CRI > 80

2 Dimming	
010V	0-10 V
DALI	DALI
DMX	DMX
IOT	IoT

3 Dimension	
XS	110 mm / 4.33 in
S	220 mm / 8.66 in
M	268 mm / 10.55 in

4 Beam Angle	
8X8	8° x 8°
10X10	10° x 10°
23X23	23° x 23°
43X43	43° x 43°
52X52	52° x 52°
8X31	8° x 31°
10X42	10° x 42°
12X60	12° x 60°
14X100	14° x 100°
WWN	30° x 11° y 14° L
WWW	30° x 58° y 14° L

5 Approbation	
CE	European Union
ETL	North America

6 Glare Protection	
OP	No Glare Protection
HL64	Honeycomb louver (internal, 6,4mm)
LL00	Linear louver 0° (internal)
LL17	Linear louver 17° (internal)

7 Leader cable length	
010	1 m (39.3 in) leader cable
030	3 m (118 in) leader cable
060	6 m (236,2 in) leader cable
090	9 m (354,3 in) leader cable
150	15 m (590,5 in) leader cable